
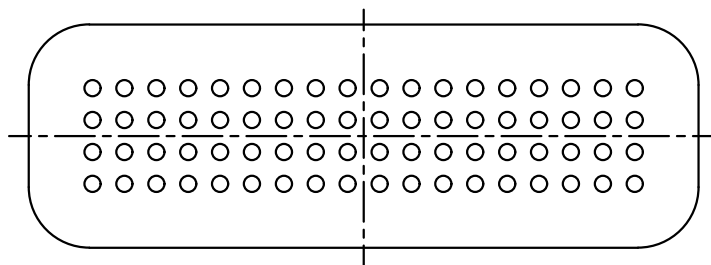

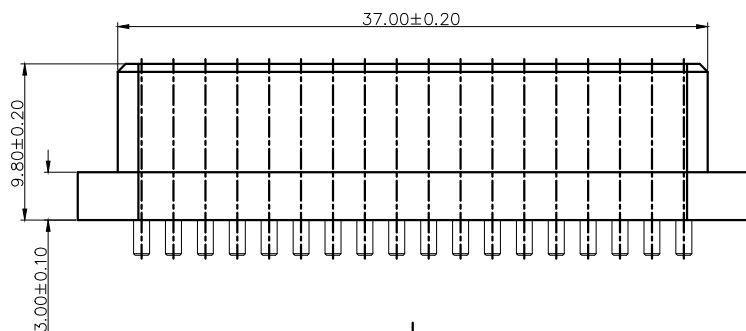


Please Approve this Drawing	
Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Pin	72	HBi59	Au 5u" Min. OVER 50U~120" Ni
2	Housing	1	High temp.Plastic; UL94 V-0 Color Black	

NOTES:

- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1.0A Max.
 - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Environmental
 - .Operating Temperature: -40°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- .RoHS&HF compliant product.

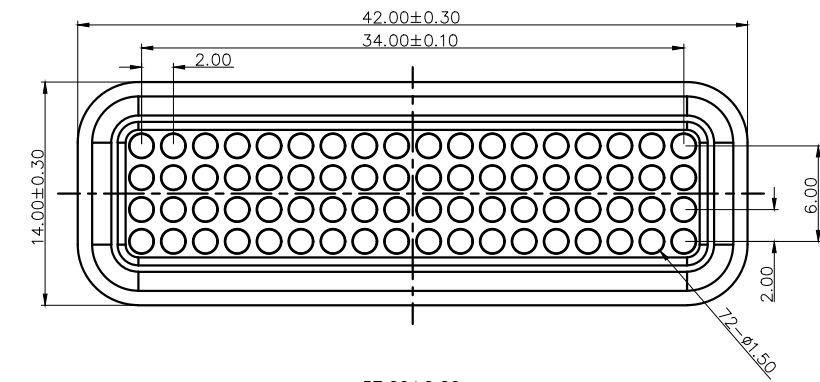

DRAWN	CDH	DATE	2022.08.19			DongGuan SUNMON Electronics Co., Ltd.			
CHECKED		SCALE	10:1	VER.	A.0				
APPROVED		TITLE	72pin POGO pin female connector.			Ang:		Dim:	
PROJECT		DRAWING NO.	PPF.72-928-0502			0	±1°	0	±0.15
SHEET	1 of 1	UNIT	mm			.0	±0.5°	.0	±0.10
						.00	±0.25°	.00	±0.05

A.0	NEW RELEASE	ECN NO.	DATE
VER.	DESCRIPTION		